

Features

- Very low smile
- Available as non-collimated (MN Series) or fast-axis collimated unit (MY Series)
- Different heatsink geometries available



Device Specification

Optical ¹	Units	
Center Wavelength Range ³	nm	1470
Center Wavelength Tolerance	nm	±20
Output Power	W	20
Number of Emitters	#	19
Emitter Size	µm	100
Fill Factor	%	20
Spectral Width (FWHM)	nm	≤12
Slope Efficiency	W/A	≥0.47
Fast Axis Divergence ⁶ (90%)	degree	<70
Slow Axis Divergence (90%)	degree	<18
Wavelength Temp. Coefficient ³	nm/°C	~ 0.35

Electrical Parameters

Power Conversion Efficiency	%	≥35
Threshold Current (I_{TH})	A	<8
Operating Current (I_{OP})	A	55
Operating Voltage (V_{OP})	V	<1.5

Thermal Parameters¹

Operating Temperature Range ^{3, 4}	°C	+20 to 30
Storage Temperature Range ⁴	°C	0 to 55
Recommended Heatsink Capacity Per Bar	W	≥70

¹Data at 20°C cold plate temperature, unless otherwise stated.


²Reduced lifetime if used above nominal operating conditions.

³Others available upon request.


⁴A non-condensing environment is required for storage and operation below the ambient dew point.

⁶For fast axis collimation using FAC lens: divergence <8mrad.

Package Dimension

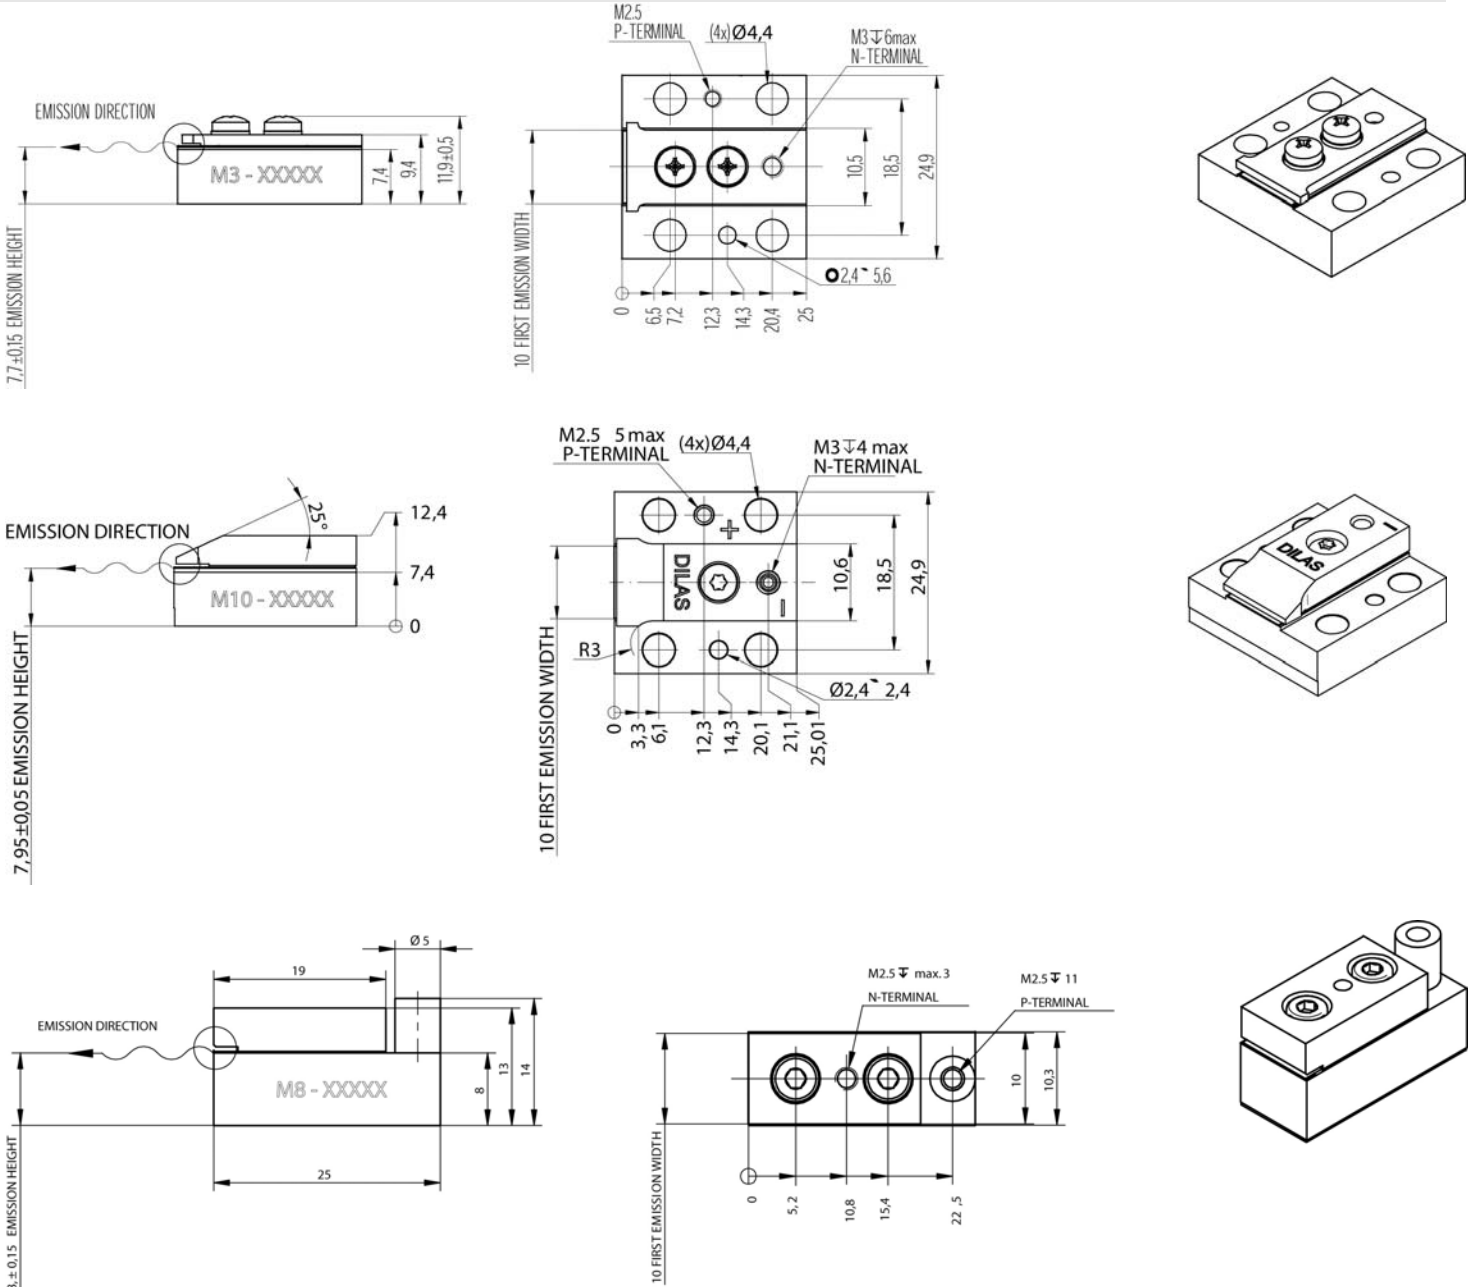

Volute for all heatsink MY-diode laser bars with fast axis collimation lens:



Other beam heights available:

- M1 mount = 8.7mm (upon request)
- M3 mount = 7.7mm
- M7 mount = 6.0mm (upon request)
- M8 mount = 8.0mm (upon request)
- M10 mount = 7.95mm



DILAS products specifications are subject to change without notice. For handling precautions, please reference the general handling instruction manual.

For complete details, please contact your local DILAS sales representative or visit our website at www.DILAS.com.

DILAS Diodenlaser GmbH
Galileo-Galilei-Straße 10
55129 Mainz
Germany
Phone: +49 (6131) 9226 0
Fax: +49 (6131) 9226 257
Email: Sales@DILAS.de
www.DILAS.com

DILAS Diode Laser, Inc.
9070 South Rita Road
Suite 1500
Tucson, AZ 85747
Phone: (520) 232-3484
Fax: (520) 232-3499
Email: Sales@DILAS-Inc.com
www.DILAS.com