
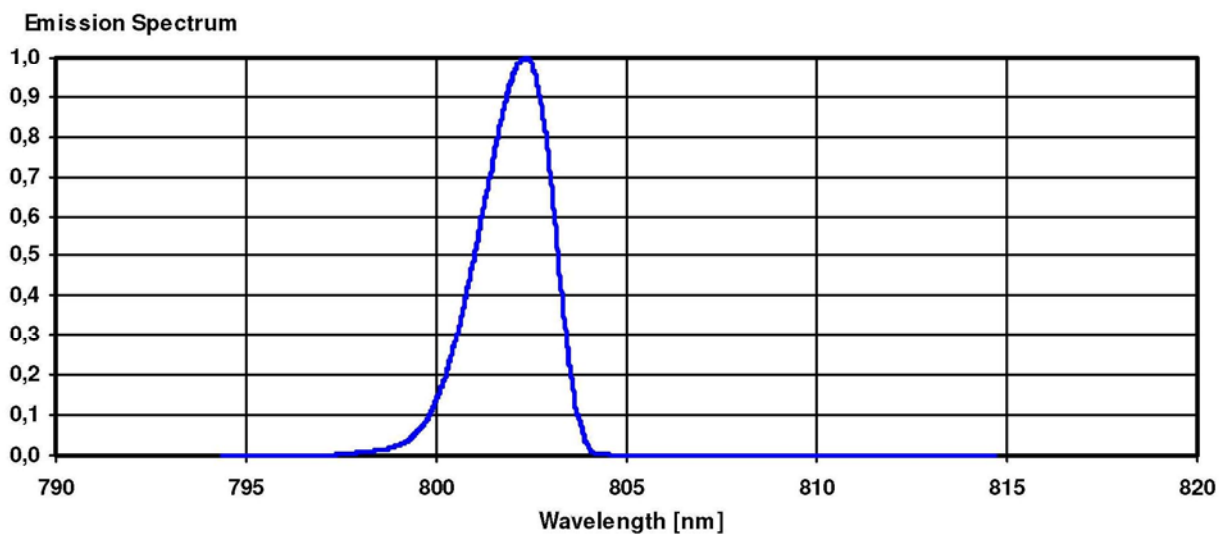


Example of E1-aXK-N-808-E9.1.10

P (160 A)	187,1 W	Wavelength (cent.)	802,0 nm
I (150,0 W)	130,2 A	Line width	3,0 nm
Threshold	14,1 A	Temperature	20,8 °C
Slope	1,33 W/A	Current	130,4 A
Overall efficiency	61,7 %	DutyCycle	2,0 %
UF	1,87 V	Frequency	40,0 Hz
UE	1,61 V		
Rs	2,0 mOhm		

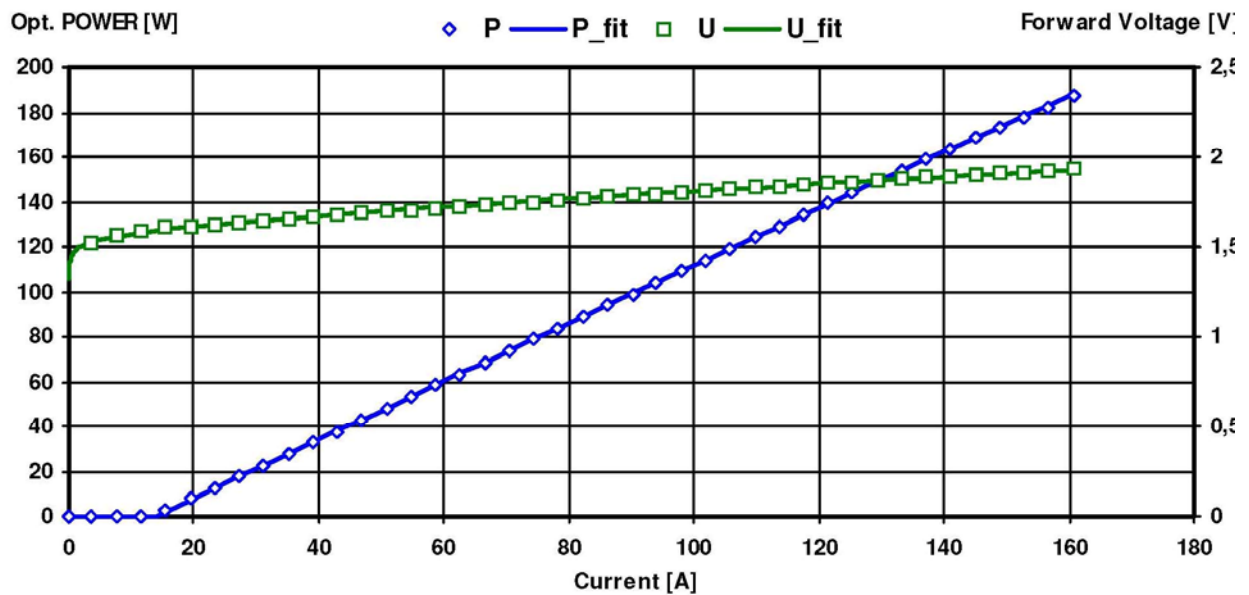

DILAS products specifications are subject to change without notice. For handling precautions, please reference the general handling instruction manual.

For complete details, please contact your local DILAS sales representative or visit our website at www.DILAS.com.

DILAS Diodenlaser GmbH
Galileo-Galilei-Straße 10
55129 Mainz
Germany
Phone: +49 (6131) 9226 0
Fax: +49 (6131) 9226 257
Email: Sales@DILAS.de
www.DILAS.com

DILAS Diode Laser, Inc.
9070 South Rita Road
Suite 1500
Tucson, AZ 85747
Phone: (520) 232-3484
Fax: (520) 232-3499
Email: Sales@DILAS-Inc.com
www.DILAS.com

